



PLANNING &
DEVELOPMENT
2101 O'Neil Avenue
Cheyenne, WY 82001
(307) 637-6282
cheyennecity.org

MEMO

To: Honorable Mayor Patrick Collins and Members of the City Council
From: Connor White, Planner II
Subject: PUDC-26-87 / Swan Ranch Rail Park 21st Filing – Expedited Plat
Date: June 22, 2026

Background:

The item for consideration is a Final Plat. This is approved by Resolution.

The proposed Governing Body review schedule is as follows:

- Introduction and Referral June 22, 2026
- Public Services Committee July 6, 2026
- Final Consideration July 13, 2026

Planning Commission Recommendation:

The Planning Commission heard this item at their June 1, 2026 meeting and recommended the Governing Body approve this application with the following condition:

1. Prior to recording of the final plat:
 - a. All technical corrections be made.

Since the Planning Commission meeting the applicant has made the necessary corrections and no conditions are required.

The Planning Commission Staff report is attached. Minor scrivener errors have been corrected.

Public Comment

As of the creation of this memo (June 16, 2026), Staff has received no inquires or comments from the public on this project. The project page on the website has received 171 views and no comments.

Attachments:

1. Resolution
2. Planning Commission Staff Report

RESOLUTION NO. _____

ENTITLED: “A RESOLUTION AUTHORIZING THE MAYOR AND THE CITY CLERK TO SIGN A FINAL PLAT FOR SWAN RANCH RAIL PARK, 21ST FILING, CITY OF CHEYENNE, LARAMIE COUNTY, WYOMING (LOCATED WEST OF INTERSTATE 25 AND NORTH OF WEST WALLICK ROAD).”

WHEREAS, Laramie Land Holdings, LLC and 2R Investments, LLC have subdivided certain land located west of Interstate 25 and north of West Wallick Road in accordance with applicable Wyoming Statutes;

WHEREAS, Laramie Land Holdings, LLC and 2R Investments, LLC, the owners of the above-described land, have caused a subdivision plat of said land to be prepared, acknowledged, and certified, particularly describing the lots, blocks, easements and rights-of-way contained therein; and

WHEREAS, the above-described subdivision plat has been presented to the City of Cheyenne Planning Commission for consideration, the Planning Commission has recommended approval of said plat to the Governing Body, and the plat has been duly executed by the Development Office.

NOW, THEREFORE BE IT RESOLVED BY THE GOVERNING BODY OF THE CITY OF CHEYENNE, WYOMING, that the subdivision described as Swan Ranch Rail Park, 21st Filing, Cheyenne, Wyoming, be and the same is hereby approved and confirmed as presented, and that the Mayor and the City Clerk are hereby authorized, empowered, and directed to execute the final plat.

PRESENTED, READ AND ADOPTED THIS _____ DAY OF _____, 2026.

Patrick Collins, Mayor

(SEAL)

ATTEST:

Kylie Soden, City Clerk

LEGEND

- FOUND ALUMINUM CAP
- ▣ FOUND WYDOT RIGHT OF WAY MARKER
- ⊙ SET 2" ALUMINUM CAP, AVI PC PLS 12045

(R) RECORD DATA FROM PLAT OF SWAN RANCH RAIL PARK 18TH FILING

(R1) RECORD DATA FROM MAP OF SURVEY FOR CLEAR CREEK PARKWAY


(R2) RECORD DATA FROM PLAT OF OVERLAND TRAILS BUSINESS PARK FIRST FILING

(R3) RECORD DATA FROM BOOK 2945 PAGE 2943



(R4) RECORD DATA FROM PLAT OF SWAN RANCH RAIL PARK 8TH FILING

(M) MEASURED DATA AVI SURVEY

FEMA 100-YEAR FLOODPLAIN FROM GIS MAPPING

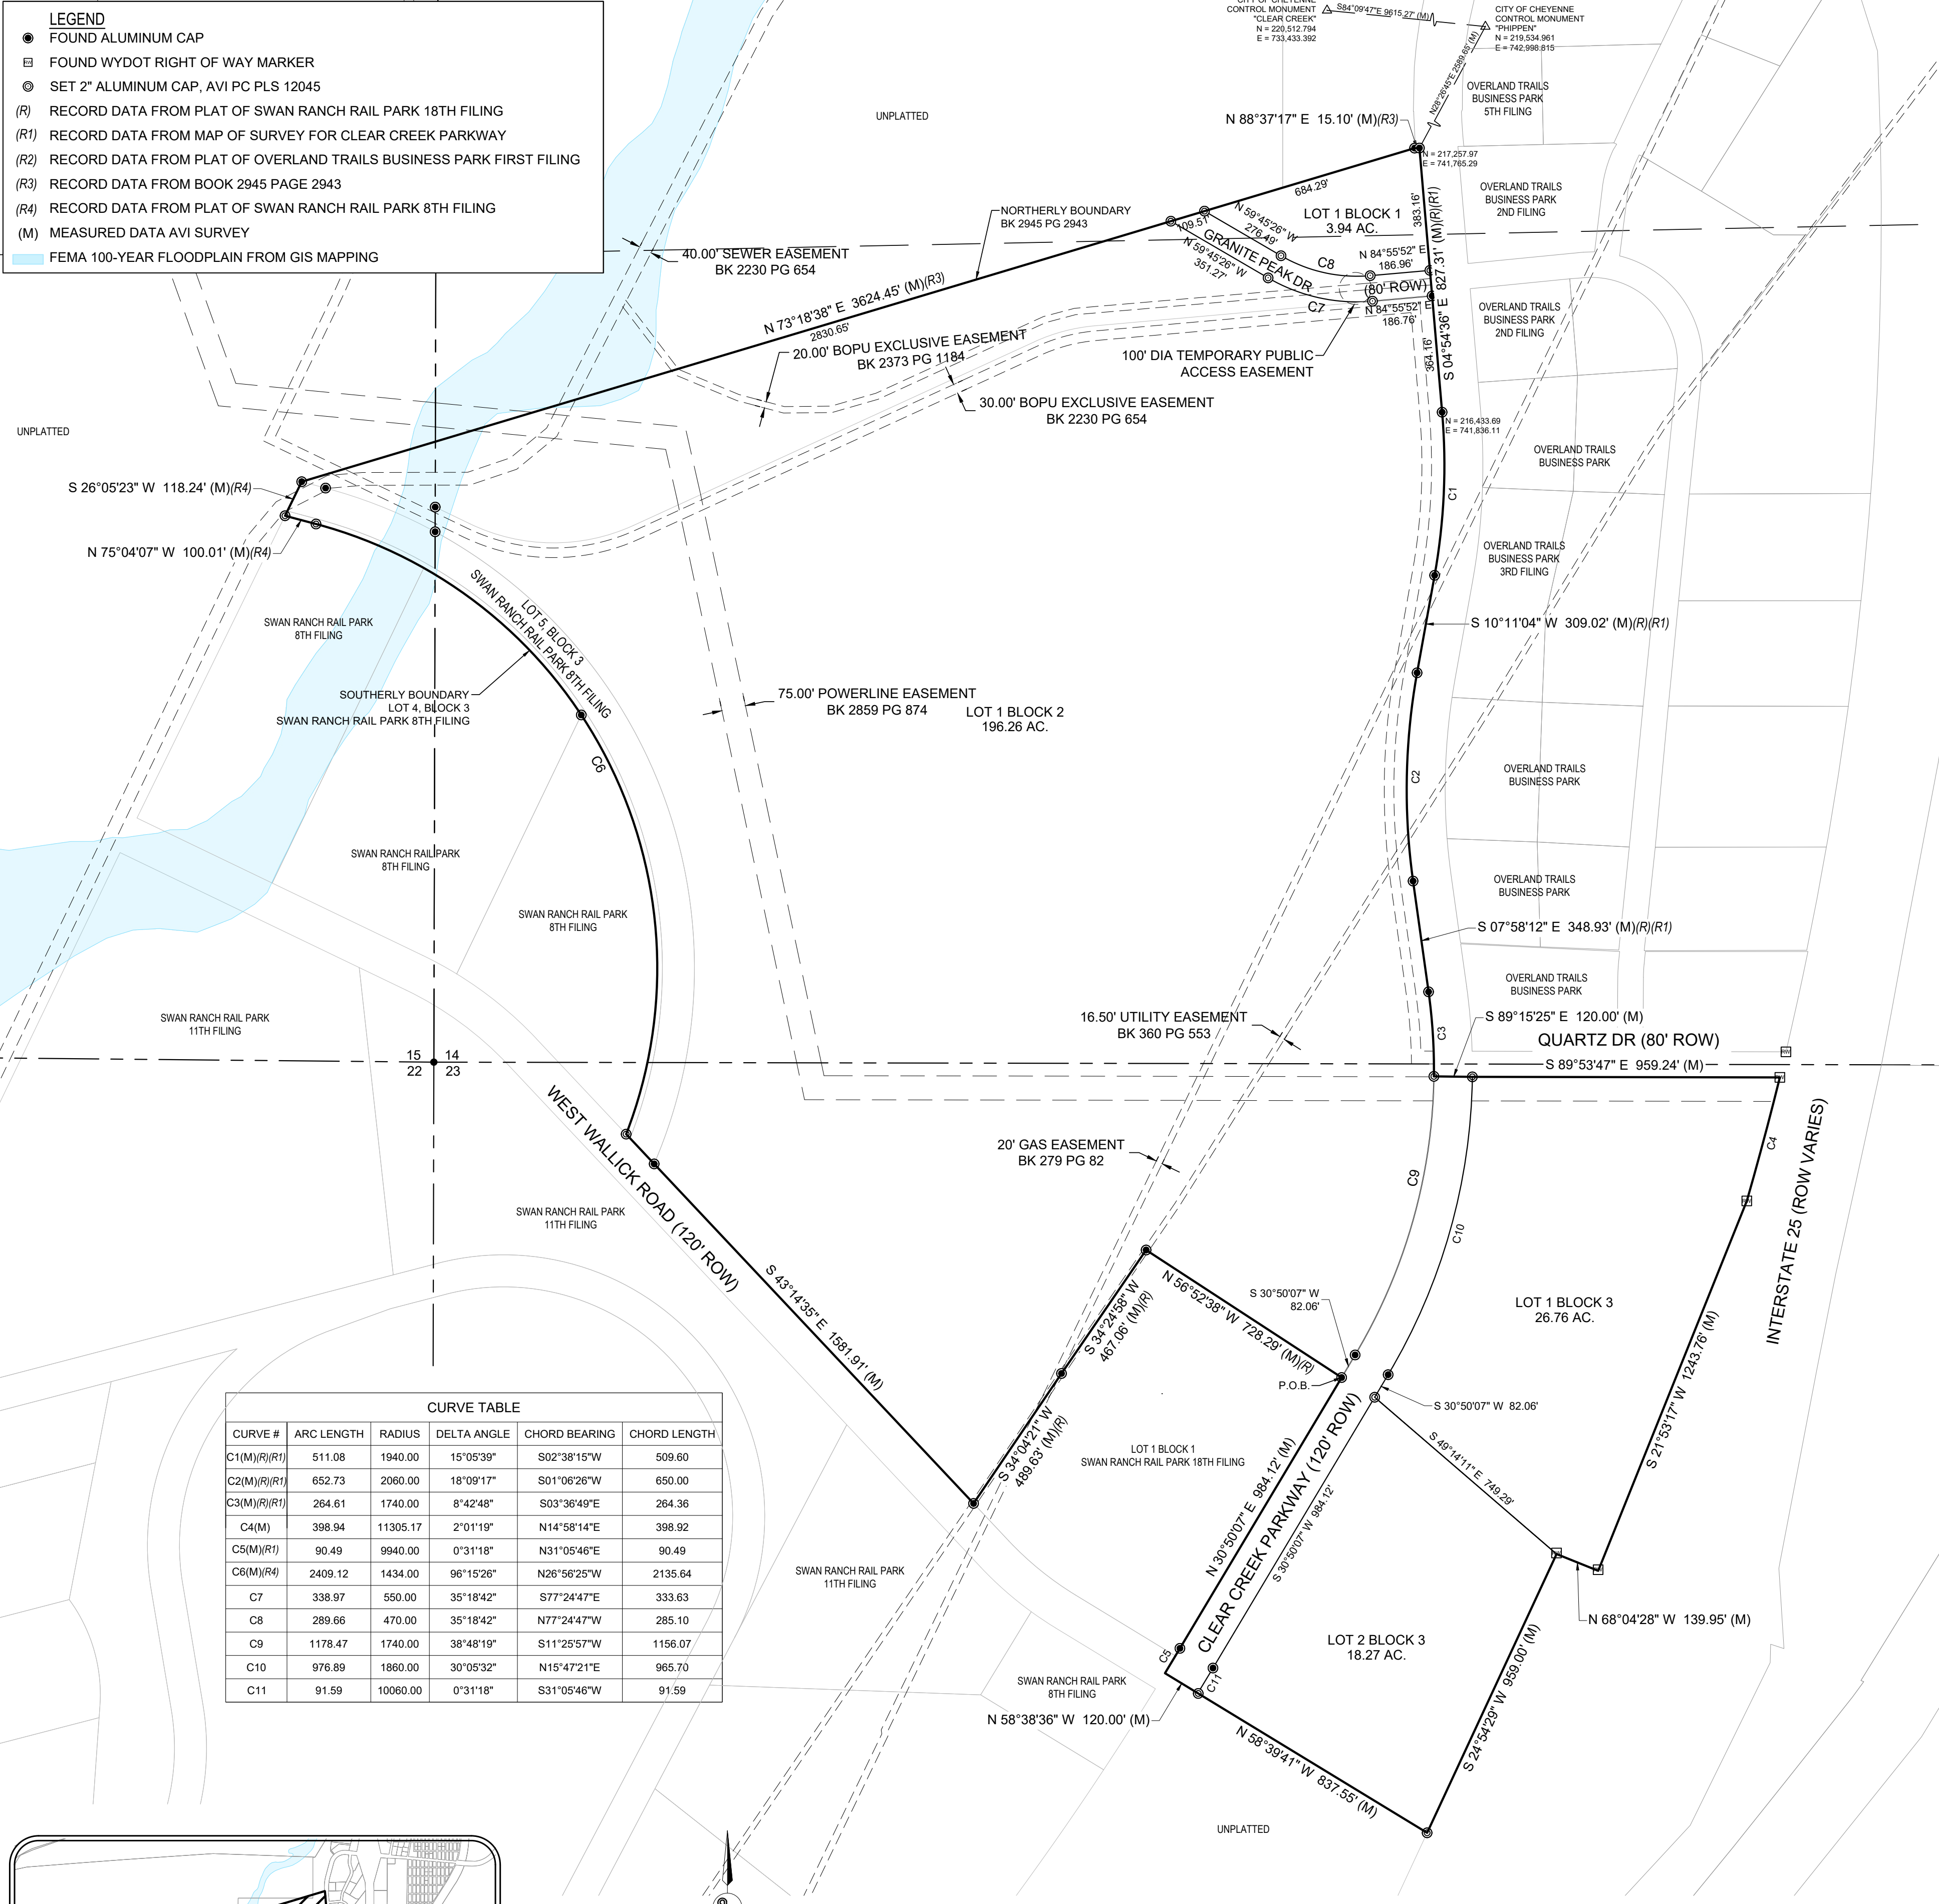

CURVE TABLE					
CURVE #	ARC LENGTH	RADIUS	DELTA ANGLE	CHORD BEARING	CHORD LENGTH
C1(M)(R)(R1)	511.08	1940.00	15°05'39"	S02°38'15"W	509.60
C2(M)(R)(R1)	652.73	2060.00	18°09'17"	S01°06'26"W	650.00
C3(M)(R)(R1)	264.61	1740.00	8°42'48"	S03°36'49"E	264.36
C4(M)	398.94	11305.17	2°01'19"	N14°58'14"E	398.92
C5(M)(R1)	90.49	9940.00	0°31'18"	N31°05'46"E	90.49
C6(M)(R4)	2409.12	1434.00	96°15'26"	N26°56'25"W	2135.64
C7	338.97	550.00	35°18'42"	S77°24'47"E	333.63
C8	289.66	470.00	35°18'42"	N77°24'47"W	285.10
C9	1178.47	1740.00	38°48'19"	S11°25'57"W	1156.07
C10	976.89	1860.00	30°05'32"	N15°47'21"E	965.70
C11	91.59	10060.00	0°31'18"	S31°05'46"W	91.59

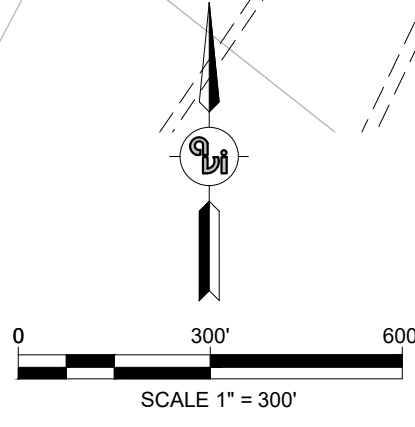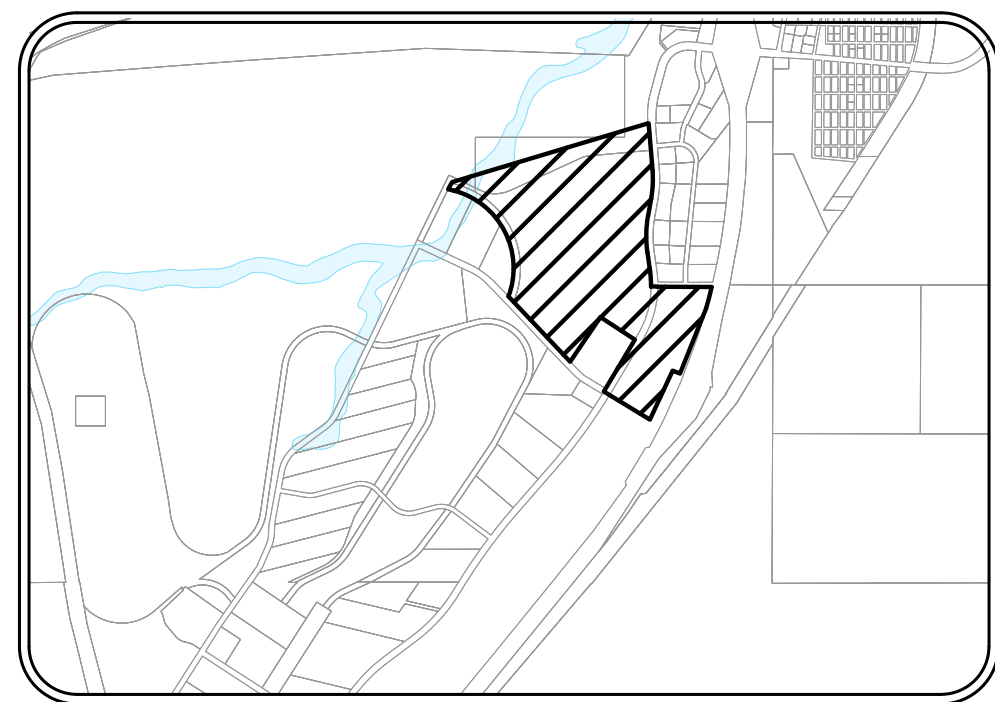


NOTES:

- PUBLIC WATER AND WASTE WATER SYSTEMS TO CONNECT TO EXISTING CHEYENNE BOARD OF PUBLIC UTILITIES.
- FIRE PROTECTION WILL BE PROVIDED BY THE CITY OF CHEYENNE FIRE DEPARTMENT.

CERTIFICATE OF SURVEYOR

I, ADAM E. DESCHLER, A PROFESSIONAL LAND SURVEYOR LICENSED IN THE STATE OF WYOMING DO HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM THE RECORDS AND FIELD NOTES OF A SURVEY CONDUCTED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT ALL DIMENSIONS AND OTHER DETAILS ARE CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

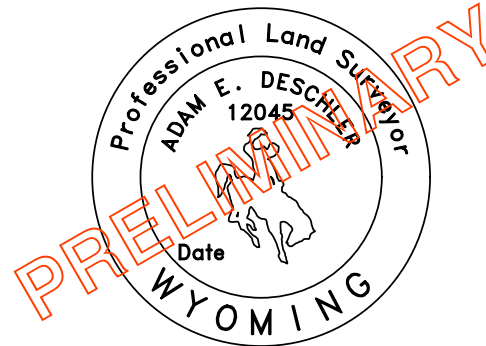

LEGAL DESCRIPTION

THE FOLLOWING IS A DESCRIPTION FOR A PARCEL OF LAND BEING A REPLAT OF TRACT A (REMAINDER LOT) OF SWAN RANCH RAIL PARK 18TH FILING, TRACT 1 OF SWAN RANCH RAIL PARK 20TH FILING, LOTS 4 AND 5, BLOCK 3 OF SWAN RANCH RAIL PARK 8TH FILING AND A PORTION OF CLEAR CREEK PARKWAY. BEING SITUATED IN A PORTION OF SECTIONS 14, 15 AND 23, TOWNSHIP 13 NORTH, RANGE 67 WEST OF THE SIXTH PRINCIPAL MERIDIAN, CITY OF CHEYENNE AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT A POINT OF INTERSECTION OF THE WESTERLY RIGHT OF WAY OF CLEAR CREEK PARKWAY AND THE NORTHERLY BOUNDARY OF LOT 1, BLOCK 1 OF SWAN RANCH RAIL PARK 18TH FILING; THENCE ALONG SAID NORTHERLY BOUNDARY N56°52'38"W, A DISTANCE OF 728.29 FEET TO A POINT ON THE WESTERLY BOUNDARY OF SAID LOT 1, BLOCK 1; THENCE ALONG SAID WESTERLY BOUNDARY THE FOLLOWING COURSES AND DISTANCES: S34°24'58"W, A DISTANCE OF 467.06 FEET; THENCE S34°04'21"W, A DISTANCE OF 489.63 FEET TO A POINT ON THE NORTHERLY RIGHT OF WAY OF WEST WALLICK ROAD; THENCE ALONG SAID NORTHERLY RIGHT OF WAY N43°14'35"W, A DISTANCE OF 1,581.91 FEET TO A POINT ON THE SOUTHERLY BOUNDARY OF LOT 4, BLOCK 3 OF SWAN RANCH RAIL PARK 8TH FILING AND THE BEGINNING OF A NON-TANGENTIAL CURVE TO THE LEFT; SAID CURVE HAVING A RADIUS OF 1,434.00 FEET, A CHORD BEARING OF N26°56'25"W, A DISTANCE OF 2,135.64 FEET AND A CENTRAL ANGLE OF 96°15'26", THENCE ALONG SAID SOUTHERLY BOUNDARY AND THE ARC OF SAID CURVE A DISTANCE OF 2,409.12 FEET; THENCE CONTINUING ALONG SAID SOUTHERLY BOUNDARY N75°04'07"W, A DISTANCE OF 100.01 FEET TO A POINT ON THE WESTERLY BOUNDARY OF SAID SWAN RANCH RAIL PARK 8TH FILING; THENCE ALONG SAID WESTERLY BOUNDARY N26°05'23"E A DISTANCE OF 118.24 FEET TO A POINT ON THE NORTHERLY BOUNDARY OF A PARCEL OF LAND DESCRIBED IN BOOK 2945, PAGE 2943 OF THE LARAMIE COUNTY RECORDS; THENCE ALONG SAID NORTHERLY BOUNDARY THE FOLLOWING COURSES AND DISTANCES: THENCE N73°18'38"E, A DISTANCE OF 3,624.45 FEET; THENCE N88°37'17"E, A DISTANCE OF 15.10 FEET TO A POINT ON THE WESTERLY RIGHT OF WAY OF CLEAR CREEK PARKWAY; THENCE ALONG SAID WESTERLY RIGHT OF WAY THE FOLLOWING COURSES AND DISTANCES: THENCE S04°54'36"E, A DISTANCE OF 827.31 FEET TO THE BEGINNING OF A CURVE TO THE RIGHT; SAID CURVE HAVING A RADIUS OF 1,940.00 FEET, A CHORD BEARING OF S02°38'15"W, A CHORD DISTANCE OF 509.60 FEET AND A CENTRAL ANGLE OF 15°05'39", THENCE ALONG THE ARC OF SAID CURVE A DISTANCE OF 511.08 FEET; THENCE S10°11'04"W, A DISTANCE OF 309.02 FEET TO THE BEGINNING OF A CURVE TO THE LEFT; SAID CURVE HAVING A RADIUS OF 2,060.00 FEET, A CHORD BEARING OF S01°06'26"W, A CHORD DISTANCE OF 650.00 FEET AND A CENTRAL ANGLE OF 18°09'17", THENCE ALONG THE ARC OF SAID CURVE A DISTANCE OF 652.73 FEET; THENCE S07°58'12"E, A DISTANCE OF 348.93 FEET TO THE BEGINNING OF A CURVE TO THE RIGHT; SAID CURVE HAVING A RADIUS OF 1,740.00 FEET, A CHORD BEARING OF S03°36'49"E, A CHORD DISTANCE OF 264.36 FEET; AND A CENTRAL ANGLE OF 08°42'48", THENCE ALONG THE ARC OF SAID CURVE A DISTANCE OF 264.61 FEET TO A POINT OF INTERSECTION WITH A NON-TANGENTIAL LINE; THENCE LEAVING SAID WESTERLY RIGHT OF WAY S89°15'25"E, A DISTANCE OF 120.00 FEET TO A POINT OF INTERSECTION OF THE EASTERLY RIGHT OF WAY OF SAID CLEAR CREEK PARKWAY AND THE SOUTHERLY RIGHT OF WAY OF QUARTZ DRIVE; THENCE ALONG SAID SOUTHERLY RIGHT OF WAY S89°53'47"E, A DISTANCE OF 959.24 FEET TO A POINT ON THE WESTERLY RIGHT OF WAY OF INTERSTATE 25 AND THE BEGINNING OF A NON-TANGENT CURVE TO THE RIGHT. SAID CURVE HAVING A RADIUS OF 11,305.17 FEET, A CHORD BEARING OF S14°58'14"W, A CHORD DISTANCE OF 398.92 FEET; AND A CENTRAL ANGLE OF 02°01'19", THENCE ALONG SAID WESTERLY RIGHT OF WAY AND THE ARC OF SAID CURVE A DISTANCE OF 398.94 FEET TO A POINT OF INTERSECTION WITH A NON-TANGENTIAL LINE; THENCE CONTINUING ALONG SAID WESTERLY RIGHT OF WAY THE FOLLOWING COURSES AND DISTANCES: S21°53'17"W, A DISTANCE OF 1,243.76 FEET; THENCE N68°04'28"W, A DISTANCE OF 139.95 FEET; THENCE S24°54'29"W, A DISTANCE OF 959.00 FEET; THENCE LEAVING SAID WESTERLY RIGHT OF WAY N58°39'41"W, A DISTANCE OF 837.55 FEET TO A POINT ON THE EASTERLY RIGHT OF WAY OF SAID CLEAR CREEK PARKWAY; THENCE N58°38'36"W A DISTANCE OF 120.00 FEET TO A POINT ON THE WESTERLY RIGHT OF WAY OF CLEAR CREEK PARKWAY AND THE BEGINNING OF A NON-TANGENTIAL CURVE TO THE LEFT; SAID CURVE HAVING A RADIUS OF 9,940.00 FEET, A CHORD BEARING OF N31°05'46"E, A CHORD DISTANCE OF 90.49 FEET, AND A CENTRAL ANGLE OF 00°31'18", THENCE ALONG SAID WESTERLY RIGHT OF WAY AND THE ARC OF SAID CURVE A DISTANCE OF 90.49 FEET; THENCE CONTINUING ALONG SAID WESTERLY RIGHT OF WAY N30°50'07"E, A DISTANCE OF 984.12 FEET TO THE POINT OF BEGINNING.

SAID PARCEL OF LAND CONTAINS 252.53 ACRES
DEDICATING 1.50 ACRES AS GRANITE PEAK DRIVE AND 5.80 ACRES FOR CLEAR CREEK PARKWAY RIGHT OF WAY WITHIN PLAT BOUNDARY.

BASIS OF BEARINGS:

COORDINATES AND DISTANCES ARE BASED ON THE WYOMING EAST STATE PLANE EAST ZONE COORDINATE SYSTEM (FIPZONE 4901) NAD 83 - 1992 ADJUSTMENT. LABELED PLAT AND PLAN DATA (COORDINATES, CURVE DATA, BEARINGS, DISTANCES AND STATIONING) ARE GRID BASED. TO OBTAIN GROUND DISTANCES MULTIPLY PLAT AND PLAN DATA BY A PROJECT SCALE FACTOR OF 1.00035315981. THE BASIS OF BEARINGS IS GEODETIC, BASED ON RTK GPS MEASUREMENTS USING A LEICA MODEL 1200 GPS SURVEYING SYSTEM.

VACATION STATEMENT

IT IS THE INTENT OF THIS PLAT TO VACATE ALL OF THE LOT LINES WITHIN THE BOUNDS OF THIS PLAT.

DEDICATION

KNOW ALL MEN BY THESE PRESENTS: THAT LARAMIE LAND HOLDINGS, LLC, AND 2R INVESTMENTS, LLC, OWNERS IN FEE SIMPLE OF THE LAND EMBRACED IN THIS FINAL PLAT OF "SWAN RANCH RAIL PARK 21ST FILING" DO HEREBY DECLARE THAT THE SUBDIVISION OF SAID LAND IS WITH THEIR FREE ACT AND DEED AND IN ACCORDANCE WITH THEIR DESIRES AND DO HEREBY DEDICATE THE RIGHT OF WAYS SHOWN HEREON TO THE PUBLIC.

RON McMURRAY, MANAGING MEMBER
LARAMIE LAND HOLDINGS, LLC
RON McMURRAY, MANAGER
2R INVESTMENTS, LLC

ACKNOWLEDGEMENTS

STATE OF WYOMING)
)SS
COUNTY OF LARAMIE)

THE FOREGOING DEDICATION WAS EXECUTED BEFORE ME ON THIS ____ DAY OF _____, 2026, BY RON McMURRAY, MANAGING MEMBER OF LARAMIE LAND HOLDINGS, LLC, AND MANAGER OF 2R INVESTMENTS, LLC, OWNERS IN FEE SIMPLE OF THE LAND EMBRACED IN THIS PLAT, AND THAT THE EXECUTION OF SAID INSTRUMENT WAS THEIR OWN FREE ACT AND DEED.

NOTARY PUBLIC, STATE OF WYOMING

MY COMMISSION EXPIRES : _____

APPROVALS

APPROVED BY THE CHEYENNE PLANNING COMMISSION THIS ____ DAY OF _____, 2026.

DEVELOPMENT DIRECTOR

APPROVED BY THE CITY COUNCIL OF THE CITY OF CHEYENNE, THIS ____ DAY OF _____, 2026.

MAYOR

CITY CLERK

FINAL PLAT
FOR
SWAN RANCH RAIL PARK 21ST FILING

A REPLAT OF TRACT A SWAN RANCH RAIL PARK 18TH FILING, TRACT 1 OF SWAN RANCH RAIL PARK 20TH FILING, LOTS 4 AND 5, BLOCK 3 OF SWAN RANCH RAIL PARK 8TH FILING AND A PORTION OF CLEAR CREEK PARKWAY SITUATED IN A PORTION OF SECTIONS 14, 15 AND 23, TOWNSHIP 13 NORTH, RANGE 67 WEST, OF THE 6TH P.M., CITY OF CHEYENNE, STATE OF WYOMING
PREPARED JUNE 2026

DATE					
REVISION					
NO.					

PREPARED FOR:
2R INVESTMENTS LLC

PROJECT:
SWAN RANCH RAIL PARK 21ST FILING

DRAWING TITLE:
FINAL PLAT


ENGINEERING · PLANNING · SURVEYING

307.637.6017
1103 OLD TOWN LANE, SUITE 101
CHEYENNE, WY 82009
AVI@AVIPC.COM

DATE: Jun 16, 2026

DRAWN BY:

DESIGNED BY: CRJ

CHECKED BY: AED

JOB NO.: 5122

DRAWING NO. 1 OF 1

CITY OF
CHEYENNE
— PLANNING & DEVELOPMENT —

CITY OF CHEYENNE PLANNING COMMISSION
JUNE 1, 2026
STAFF REPORT

FILE: PUDC-26-87: Swan Ranch Rail Park, 21st Filing (Expedited Review)

REQUEST: Subdivision of three large Lots into four Lots.

LOCATION: West of I-25 and north of West Wallick Road.


APPLICANT: Brad Emmons

OWNER: 2R Investment LLC and Laramie Land Holding LLC

ZONING: LI – Light Industrial and CB – Community Business

PURPOSE: A plat creating four Lots for industrial / commercial development.

PREPARED BY: Connor White, Planner II

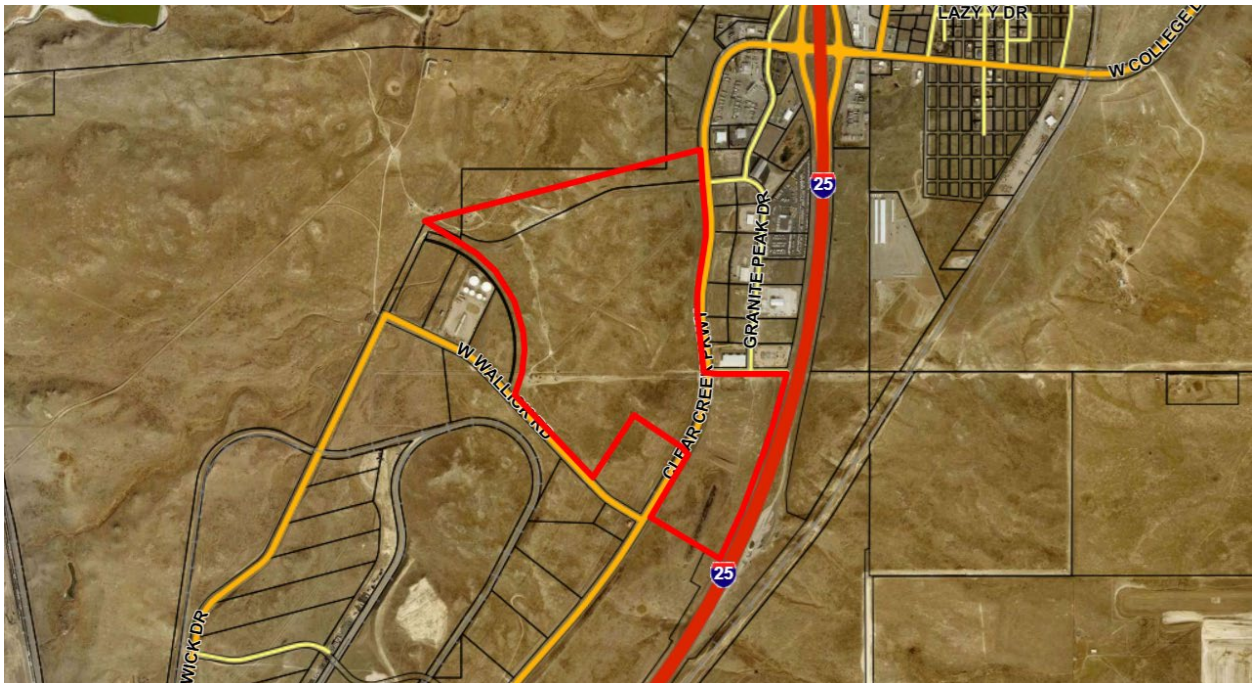

RECOMMENDED MOTION:

Move to **approve** the Swan Ranch Rail Park 21st Filing Preliminary Plat, advancing the Final Plat to the Governing Body with staff recommended conditions.

APPLICABLE CITY CODE SECTION(S) AND PLANS:

- UDC 2.1.2 Preliminary Plat Approval
- UDC 2.1.3 Final Plat Approval
- UDC Article 4 Subdivisions
- UDC Article 5 Zoning Regulations
- PlanCheyenne

BACKGROUND:

The applicant is requesting approval of an expedited plat for roughly 233.33 acres of land. The proposed plat would create four lots for industrial / commercial development. There is a proposed zoning map amendment that includes these lots to BP – Business Park (PUDC-26-86).

SURROUNDING LAND USE AND ZONING:

	Future Land Use Designation	Zoning	Land Use
Subject Site	Mixed-use Employment	LI – Light Industrial	Vacant
North	Mixed-use Employment and Open Space	LI and County LI	Industrial / Vacant
South	Mixed-use Employment	LI, County CB Community Business and PUD – Planned Unit Development	Vacant
East	Mixed-use Employment	LI and County CB	I-25, Industrial and Vacant
West	Mixed-use Employment and Open Space	County PUD and City PUD	Vacant / Industrial

ANALYSIS OF APPLICATION CONFORMANCE WITH REVIEW CRITERIA:

Should the Planning Commission wish to recommend approval of the Expedited Preliminary Plat, the Commission must make the following findings required in UDC 2.1.2.d and 2.1.3.d – a detailed analysis of which is below:

1) The application is in accordance with the development policies and physical patterns identified in the Comprehensive Plan. (UDC 2.1.2.d.1)

On the future land use map found in PlanCheyenne, the subject land has been designated as mainly Mixed-use Employment and a little bit of Open Space. The Mixed-Use Employment

Campus category is intended to include a variety of uses, with a primary focus on employment designed in a business campus setting. Many of the Mixed-Use Employment Campuses in the community (e.g. portions of Swan Ranch) are in the early stages of development or are established (e.g. North Range Business Park, and Cheyenne Business Parkway), but still have many sites available.

Foundation 1 of PlanCheyenne encourages community growth. This development is in response to market demands and is within the Urban Service Boundary. The development patterns proposed by this plat are compatible with the designations found on the future land use map.

The application **complies** with this review criterion.

2) The application reflects sound planning and urban design principles with respect to existing and potential future development in the vicinity, including consideration of current and future streets, open spaces, blocks and lots, and public utilities or facilities. (UDC 2.1.2.d.2)

The proposed plat subdivides three larger parcels into four parcels for industrial and commercial development. This plat adds an additional road and extends the utilities in the area allowing for further development. The development pattern matches other lots within the area.

The application **complies** with this review criterion, with conditions.

3) The division of land meets the purposes, intent, and all applicable standards in Article 4. (UDC 2.1.2.d.3)

Community Facility Fees (4.2):

For fees based on acreage, the area of the plat is pro-rated to the nearest tenth of an acre. Lands reserved as unbuildable (for right-of-way, detention, parks, remainder lots, etc), are exempt from fees. Park fees are calculated at \$700 per acre. All fees are due at the time of building permit.

Per UDC Section 4.2.5, Table 4-2, Enhancement Fees are payable at the issuance of a building permit for each structure. The Commercial Enhancement Fee is \$1,100 per acre.

Transportation Network (4.3):

This plat is creating an additional street that will add to the street network in the area and provide additional access to the lots. There are no block size requirements for this area.

Open Space (4.4):

Open space is not required at the platting level for this project.

Required Improvements (4.5):

This plat appears to be able to provide all required utilities to the lots within this development.

Public Safety Fees (4.6):

Public Safety Fees are required at the time of construction of any residential building on any of the proposed lots. Per UDC Section 4.6.3.b, Public Safety Fees are payable at the issuance of a building permit for each structure.

The application **complies** with this review criterion, with conditions.

- 4) Any phasing proposed in the application is clearly indicated and demonstrates a logical and well-planned development pattern. This may include consideration of amenities and public facilities of the subdivision within each phase compared to the anticipated timing or the likelihood of future phases being constructed as planned. (UDC 2.1.2.d.4)**

No specific phasing is proposed with this project.

Review criterion **not applicable**.

- 5) The impacts identified in specific studies or technical reports that were prepared or requested to be prepared in association with the application, and whether the findings and recommendations of these reports, or any modifications or conditions on approval of the application, can mitigate these impacts. (UDC 2.1.2.d.5)**

Drainage:

A drainage worksheet was submitted and reviewed. There were no concerns with drainage at the plat level for the project as presented.

Traffic:

A transportation worksheet was submitted and reviewed. There were no concerns with traffic at the plat level for the project as presented.

The application **complies** with this review criterion.

- 6) Lots proposed for development shall be buildable lots according to the existing or proposed zoning district standards, result in design and development patterns that meet the Intent and Applicability statements of the existing or proposed zoning district, and not aggravate nonconforming setbacks or currently adopted building and fire code access and separation requirements. (UDC 2.1.2.d.6)**

All lots proposed for development are buildable lots in this zone district.

The application **complies** with this review criterion.

- 7) All parcels not proposed as buildable lots and which are not dedicated to and accepted by the City shall have a clearly defined entity responsible for ongoing maintenance. (UDC 2.1.2.d.7)**

All proposed lots are proposed as buildable lots. The Plat does not propose any lots subject to this criterion.

Review criterion **not applicable**.

8) The application will not create any undue influence on existing or potential development for adjacent property considering the existing zoning and Comprehensive Plan policies for that property. (UDC 2.1.2.d.8)

This plat will not create any undue influence on existing or potential development. Much of the area is already platted and has infrastructure in place and I-25 constrains the area to the east.

The application **complies** with this review criterion.

9) The application is not harmful to the public health, safety, and welfare. (UDC 2.1.2.d.9)

City staff is satisfied that this proposed plat would not adversely affect the public health, safety, or general welfare.

The application **complies** with this review criterion.

10) Remainder lot(s) shall be clearly identified on the preliminary plat and shall not be developed or proposed for development for purposes. Remainder lot(s) shall be noted and described on all plats either graphically or by legal description. (UDC 2.1.2.d.10)

Remainder lots are not proposed with this plat.

The application **complies** with this review criterion.

11) The layout and design of the final plat is in substantial compliance with the approved preliminary plat considering the number of lots or parcels, street and block layout, and access, and any deviations in the final plat brings the application in further compliance with the Comprehensive Plan. (UDC 2.1.3.d.1)

The Final Plat submitted with the application is substantially similar to the Preliminary Plat submitted.

The application **complies** with this review criterion.

12) The application meets any conditions or modifications of the approved preliminary plat. (UDC 2.1.3.d.2)

Through staff's review there are technical corrections that need to be made prior to recording of the plat.

The application **complies** with this review criterion, with conditions.

13) The application meets the purposes, intent, and applicable standards of Article 4. (UDC 2.1.3.d.3)

As a concurrent Preliminary and Final Plat application, this Final Plat review criterion is covered by the equivalent Preliminary Plat review criterion (subsection 3 above).

The application **complies** with this review criterion.

CONFORMANCE WITH APPLICABLE PLANS:

The project is located in an area covered by the following plans:

- PlanCheyenne

Conformance with PlanCheyenne is covered by review criterion 1.

PUBLIC NOTICE AND PUBLIC COMMENTS RECEIVED:

Although projects have public notice and the opportunity for public comments, projects are required to be approved or denied based on the review criteria (listed above). Public comments relevant to the review criteria may assist the review and discussion on the application.

The public was given notice of the project in the following ways:

- **Legal Notice** in the Wyoming Tribune Eagle published on May 16, 2026.
- **Posted Notice** is not required until May 25, 2026.
- **Internet Posting** on connect.cheyennecity.org on April 10, 2026.

As of the publication of the Staff Report (May 22, 2026), Staff has received no inquiries or comments from the public on this project. The project page on the website has received 101 views and no comments.

STAFF REVIEW:

Through the review process, comments were received regarding the following issues:

1. Technical correction
2. Easements

CONCLUSION:

Staff analysis is that the application meets the review criteria and therefore recommends approval of the expedited plat application with conditions.

ALTERNATIVES:

1. Recommend approval of the expedited preliminary plat, forwarding the Final Plat to the Governing Body.
2. Recommend approval of the preliminary plat with conditions and that a final plat addressing the conditions of approval be prepared and presented to the Governing Body.

3. Recommend approval of the preliminary plat as submitted by the applicant and forward the preliminary plat to the Governing Body.
4. Recommend approval of the preliminary plat subject to staff's recommended conditions and forward the preliminary plat to the Governing Body.
5. Recommend denial of the preliminary plat based on findings of denial. The Planning Commission must conclude that the project does not meet all the review criteria. As part of the motion, findings for denial must be stated.
6. Postpone the project until issues identified during the meeting can be resolved.

General Information Regarding Alternatives:

The Planning Commission may modify staff's recommended conditions, delete conditions, add conditions, or decide contrary to staff's recommendation. In the event conditions are modified, the conditions shall relate to applicable review criteria. In the event that the Commission acts contrary to staff's recommendation or modifies conditions of approval, the Commission shall cite specific reasons (based on the review criteria) for approval or denial.


STAFF RECOMMENDATION:

Staff recommends approval of the expedited Preliminary Plat, advancing the Final Plat to the Governing Body with the following conditions and exceptions:

1. Prior to recording of the final plat:
 - a. All technical corrections be made.



ATTACHMENTS:

1. Zoning Map
2. Land Use Plan Map
3. Master Application Form
4. Preliminary Plat
5. Final Plat

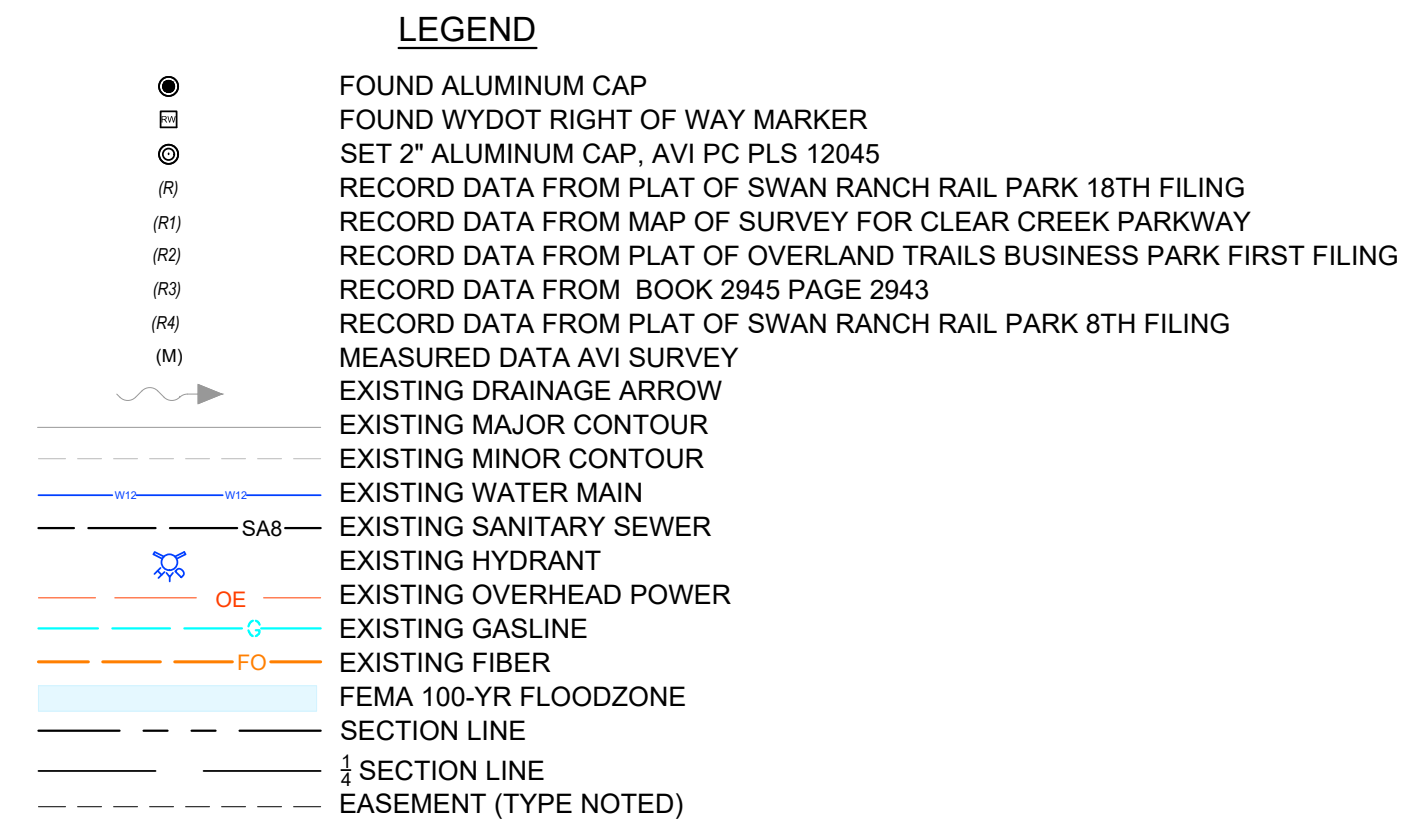

NOTES:

- EXISTING ZONING: CITY CB, LI AND PUD
- PROPOSED ZONING: CITY BP
- PROPOSED USE: TO BE DETERMINED
- NUMBER OF TRIPS PER DAY: TO BE DETERMINED
- THERE IS CURRENTLY NO PROPOSED SEWER AND WATER MAIN SYSTEMS. ALL FUTURE WATER AND SANITARY MAINS ARE TO MEET THE RULES, REGULATIONS, AND POLICIES OF THE BOARD OF PUBLIC UTILITIES.
- THERE IS NO PHASING.

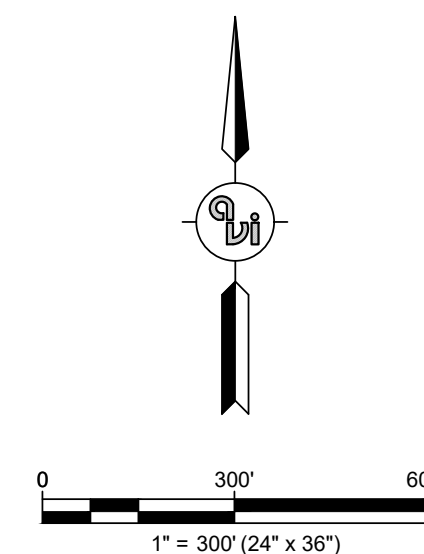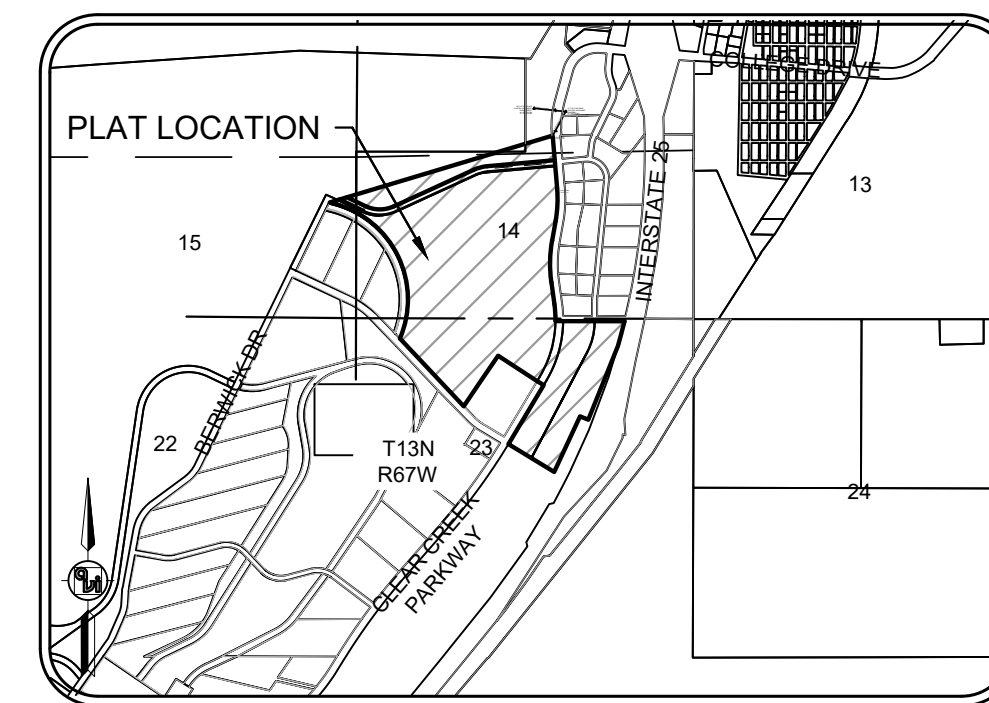

**PRELIMINARY PLAT
FOR
SWAN RANCH RAIL PARK 21ST FILING**
A REPLAT OF TRACT A SWAN RANCH RAIL PARK 18TH FILING AND
TRACT 1, SWAN RANCH RAIL PARK 20TH FILING. SITUATED IN A
PORTION OF THE SECTIONS 14 AND 23, TOWNSHIP 13 NORTH, RANGE 6
WEST, OF THE 6TH P.M., CITY OF CHEYENNE, COUNTY OF LARAMIE,
STATE OF WYOMING
PREPARED APRIL 2026

[illegible]

PREPARED FOR:
2R INVESTMENTS LLC

SWAN RANCH RAIL PARK 21ST FILING

PROJECT: SW
DRAWING TITLE:



307.637.6017
1103 OLD TOWN LANE, SUITE 101
CHEYENNE, WY 82009
AVI@AVIPC.COM

DATE: Apr 08, 2026

DRAWN BY:	CRJ
DESIGNED BY:	

CHECKED BY: AFD

JOB NO.: 5122

DRAWING NO. 1 OF 1

LEGEND

- FOUND ALUMINUM CAP
- ▣ FOUND WYDOT RIGHT OF WAY MARKER
- ⊙ SET 2" ALUMINUM CAP, AVI PC PLS 12045

(R) RECORD DATA FROM PLAT OF SWAN RANCH RAIL PARK 18TH FILING

(R1) RECORD DATA FROM MAP OF SURVEY FOR CLEAR CREEK PARKWAY


(R2) RECORD DATA FROM PLAT OF OVERLAND TRAILS BUSINESS PARK FIRST FILING

(R3) RECORD DATA FROM BOOK 2945 PG 2943



(R4) RECORD DATA FROM PLAT OF SWAN RANCH RAIL PARK 8TH FILING

(M) MEASURED DATA AVI SURVEY

FEMA 100-YEAR FLOODPLAIN FROM GIS MAPPING

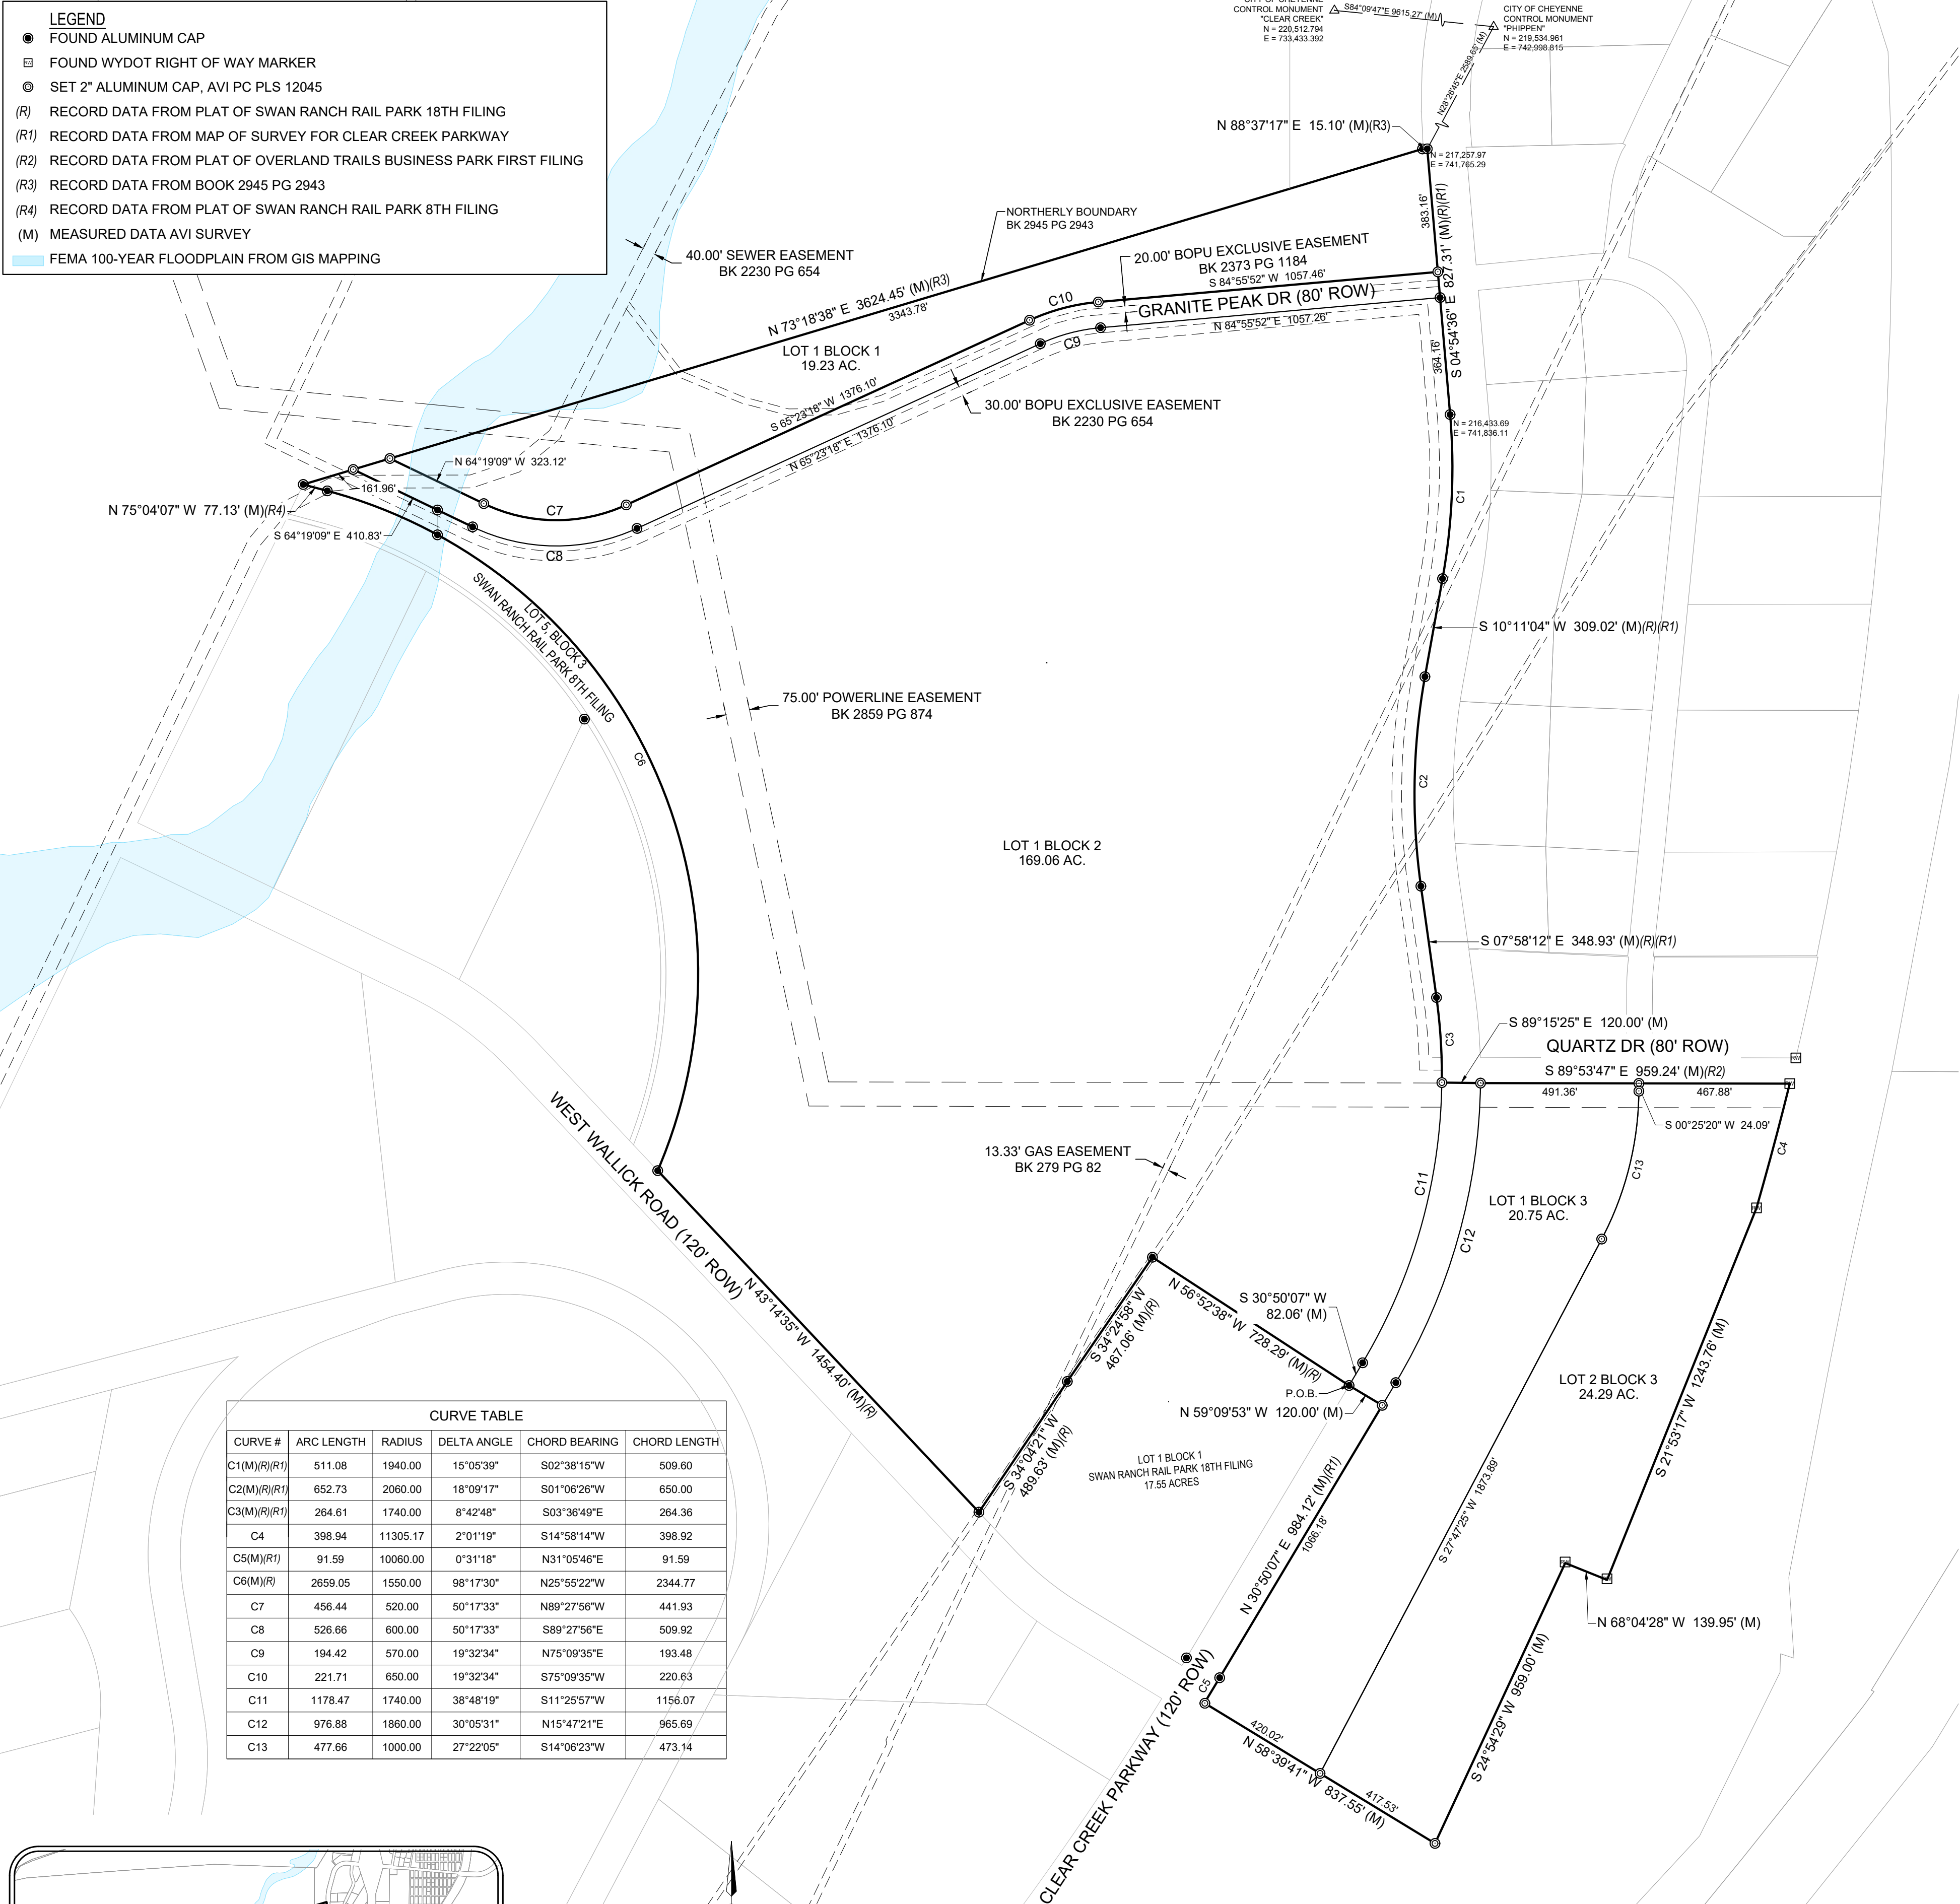

CURVE TABLE					
CURVE #	ARC LENGTH	RADIUS	DELTA ANGLE	CHORD BEARING	CHORD LENGTH
C1(M)(R)(R1)	511.08	1940.00	15°05'39"	S02°38'15"W	509.60
C2(M)(R)(R1)	652.73	2060.00	18°09'17"	S01°06'26"W	650.00
C3(M)(R)(R1)	264.61	1740.00	8°42'48"	S03°36'49"E	264.36
C4	398.94	11305.17	2°01'19"	S14°56'14"W	398.92
C5(M)(R1)	91.59	10060.00	0°31'18"	N31°05'46"E	91.59
C6(M)(R)	2659.05	1550.00	98°17'30"	N25°55'22"W	2344.77
C7	456.44	520.00	50°17'33"	N89°27'56"W	441.93
C8	526.66	600.00	50°17'33"	S89°27'56"E	509.92
C9	194.42	570.00	19°32'34"	N75°09'35"E	193.48
C10	221.71	650.00	19°32'34"	S75°09'35"W	220.63
C11	1178.47	1740.00	38°48'19"	S11°25'57"W	1156.07
C12	976.88	1860.00	30°05'31"	N15°47'21"E	965.69
C13	477.66	1000.00	27°22'05"	S14°06'23"W	473.14

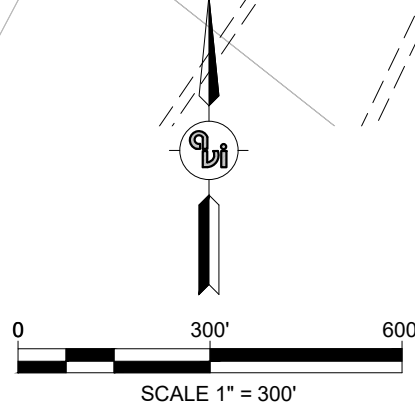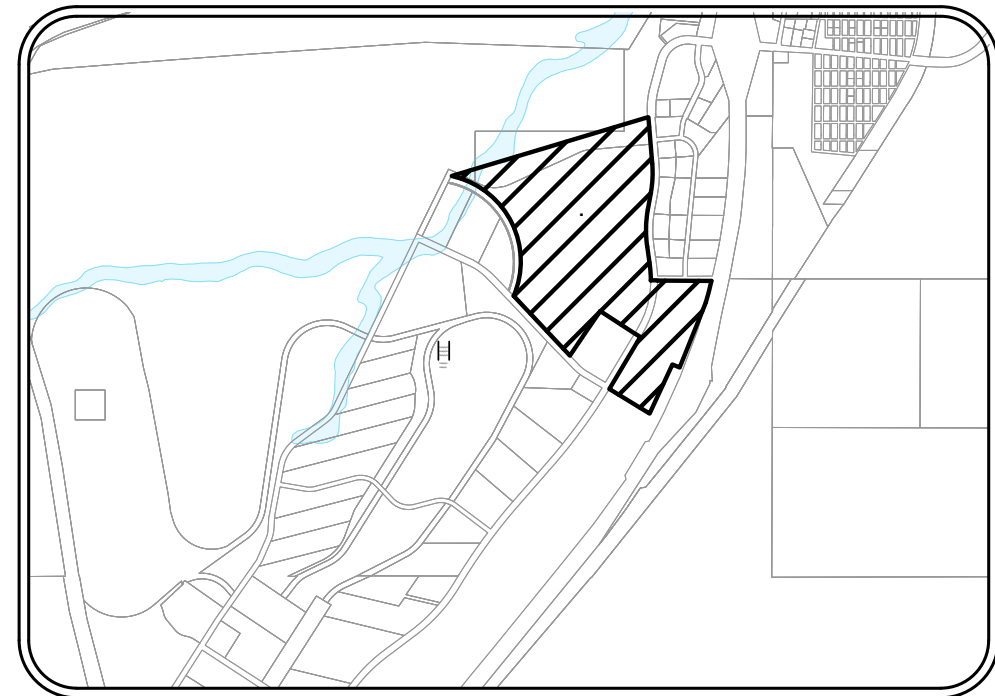

FILING RECORD

NOTES:

- PUBLIC WATER AND WASTE WATER SYSTEMS TO CONNECT TO EXISTING CHEYENNE BOARD OF PUBLIC UTILITIES.
- FIRE PROTECTION WILL BE PROVIDED BY THE CITY OF CHEYENNE FIRE DEPARTMENT.

LEGAL DESCRIPTION

THE FOLLOWING IS A DESCRIPTION FOR A PARCEL OF LAND BEING A REPLAT OF TRACT A (REMAINDER LOT) OF SWAN RANCH RAIL PARK 18TH FILING, TRACT 1 OF SWAN RANCH RAIL PARK 20TH FILING AND A PORTION OF CLEAR CREEK PARKWAY. BEING SITUATED IN A PORTION OF SECTIONS 14, 15 AND 23, TOWNSHIP 13 NORTH, RANGE 67 WEST OF THE SIXTH PRINCIPAL MERIDIAN, CITY OF CHEYENNE AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT A POINT OF INTERSECTION OF THE WESTERLY RIGHT OF WAY OF CLEAR CREEK PARKWAY AND THE NORTHERLY BOUNDARY OF LOT 1, BLOCK 1 OF SWAN RANCH RAIL PARK 18TH FILING; THENCE ALONG SAID NORTHERLY RIGHT OF WAY N56°52'38"W, A DISTANCE OF 728.29 FEET TO A POINT ON THE WESTERLY BOUNDARY OF SAID LOT 1, BLOCK 1; THENCE ALONG SAID WESTERLY BOUNDARY THE FOLLOWING COURSES AND DISTANCES: S34°24'58"W, A DISTANCE OF 467.06 FEET; THENCE S34°04'21"W, A DISTANCE OF 489.63 FEET TO A POINT ON THE NORTHERLY RIGHT OF WAY OF WEST WALLICK ROAD; THENCE ALONG SAID NORTHERLY RIGHT OF WAY N43°14'35"W, A DISTANCE OF 1,454.40 FEET TO A POINT ON THE NORTHERLY BOUNDARY OF LOT 5, BLOCK 3 OF SWAN RANCH RAIL PARK 8TH FILING AND THE BEGINNING OF A NON-TANGENTIAL CURVE TO THE LEFT; SAID CURVE HAVING A RADIUS OF 1,550.00 FEET, A CHORD BEARING OF N25°55'22"W, A DISTANCE OF 2,344.77 FEET AND A CENTRAL ANGLE OF 98°17'30", THENCE ALONG SAID NORTHERLY BOUNDARY AND THE ARC OF SAID CURVE A DISTANCE OF 2,659.05 FEET; THENCE CONTINUING ALONG SAID NORTHERLY BOUNDARY N75°04'07"W, A DISTANCE OF 77.13 FEET TO A POINT ON THE NORTHERLY BOUNDARY OF A PARCEL OF LAND DESCRIBED IN BOOK 2945, PAGE 2943 OF THE LARAMIE COUNTY RECORDS; THENCE ALONG SAID NORTHERLY BOUNDARY THE FOLLOWING COURSES AND DISTANCES: THENCE N73°18'38"E, A DISTANCE OF 3,624.45 FEET; THENCE N88°37'17"E, A DISTANCE OF 15.10 FEET TO A POINT ON THE WESTERLY RIGHT OF WAY OF CLEAR CREEK PARKWAY; THENCE ALONG SAID WESTERLY RIGHT OF WAY THE FOLLOWING COURSES AND DISTANCES: THENCE S04°54'36"E, A DISTANCE OF 827.31 FEET TO THE BEGINNING OF A CURVE TO THE RIGHT; SAID CURVE HAVING A RADIUS OF 1,940.00 FEET, A CHORD BEARING OF S02°38'15"W, A CHORD DISTANCE OF 509.60 FEET AND A CENTRAL ANGLE OF 15°05'39", THENCE ALONG THE ARC OF SAID CURVE A DISTANCE OF 511.08 FEET; THENCE S10°11'04"W, A DISTANCE OF 309.02 FEET TO THE BEGINNING OF A CURVE TO THE LEFT; SAID CURVE HAVING A RADIUS OF 2,060.00 FEET, A CHORD BEARING OF S01°06'26"W, A CHORD DISTANCE OF 650.00 FEET AND A CENTRAL ANGLE OF 18°09'17", THENCE ALONG THE ARC OF SAID CURVE A DISTANCE OF 652.73 FEET; THENCE S 07°58'13" E, A DISTANCE OF 348.93 FEET TO THE BEGINNING OF A CURVE TO THE RIGHT; SAID CURVE HAVING A RADIUS OF 1,740.00 FEET, A CHORD BEARING OF S03°36'49"E, A CHORD DISTANCE OF 264.36 FEET; AND A CENTRAL ANGLE OF 08°42'48", THENCE ALONG THE ARC OF SAID CURVE A DISTANCE OF 264.61 FEET TO A POINT OF INTERSECTION WITH A NON-TANGENTIAL LINE; THENCE LEAVING SAID WESTERLY RIGHT OF WAY S89°15'25"E, A DISTANCE OF 120.00 FEET TO A POINT OF INTERSECTION OF THE EASTERLY RIGHT OF WAY OF SAID CLEAR CREEK PARKWAY AND THE SOUTHERLY RIGHT OF WAY OF QUARTZ DRIVE; THENCE ALONG SAID SOUTHERLY RIGHT OF WAY S89°53'47"E, A DISTANCE OF 959.24 FEET TO A POINT ON THE WESTERLY RIGHT OF WAY OF INTERSTATE 25 AND THE BEGINNING OF A NON-TANGENTIAL CURVE TO THE RIGHT. SAID CURVE HAVING A RADIUS OF 11,305.17 FEET, A CHORD BEARING OF S14°58'14"W, A CHORD DISTANCE OF 398.92 FEET; AND A CENTRAL ANGLE OF 02°01'19", THENCE ALONG SAID WESTERLY RIGHT OF WAY AND THE ARC OF SAID CURVE A DISTANCE OF 398.94 FEET TO A POINT OF INTERSECTION WITH A NON-TANGENTIAL LINE; THENCE CONTINUING ALONG SAID WESTERLY RIGHT OF WAY THE FOLLOWING COURSES AND DISTANCES: S21°53'17"W, A DISTANCE OF 1,243.76 FEET; THENCE N68°04'29"W, A DISTANCE OF 139.95 FEET; THENCE S24°54'29"W, A DISTANCE OF 959.00 FEET; THENCE LEAVING SAID WESTERLY RIGHT OF WAY N68°39'41"W, A DISTANCE OF 837.55 FEET TO A POINT ON THE EASTERLY RIGHT OF WAY OF SAID CLEAR CREEK PARKWAY AND THE BEGINNING OF A NON-TANGENTIAL CURVE TO THE LEFT; SAID CURVE HAVING A RADIUS OF 10,060.00 FEET, A CHORD BEARING OF N31°05'46"E, A CHORD DISTANCE OF 91.59 FEET, AND A CENTRAL ANGLE OF 00°31'18", THENCE ALONG SAID EASTERLY RIGHT OF WAY AND THE ARC OF SAID CURVE A DISTANCE OF 91.59 FEET; THENCE CONTINUING ALONG SAID EASTERLY RIGHT OF WAY N30°50'07"E, A DISTANCE OF 984.12 FEET; THENCE LEAVING SAID EASTERLY RIGHT OF WAY N59°09'53"W, A DISTANCE OF 120.00 FEET TO THE POINT OF BEGINNING.

SAID PARCEL OF LAND CONTAINS 242.58 ACRES

BASIS OF BEARINGS:

COORDINATES AND DISTANCES ARE BASED ON THE WYOMING EAST STATE PLANE EAST ZONE COORDINATE SYSTEM (FIPZONE 4901) NAD 83 - 1992 ADJUSTMENT. LABELED PLAT AND PLAN DATA (COORDINATES, CURVE DATA, BEARINGS, DISTANCES AND STATIONING) ARE GRID BASED. TO OBTAIN GROUND DISTANCES MULTIPLY PLAT AND PLAN DATA BY A PROJECT SCALE FACTOR OF 1.00035315981. THE BASIS OF BEARINGS IS GEODETIC, BASED ON RTK GPS MEASUREMENTS USING A LEICA MODEL 1200 GPS SURVEYING SYSTEM.

DEDICATION

KNOW ALL MEN BY THESE PRESENTS: THAT LARAMIE LAND HOLDINGS, LLC, AND 2R INVESTMENTS, LLC, OWNERS IN FEE SIMPLE OF THE LAND EMBRACED IN THIS FINAL PLAT OF "SWAN RANCH RAIL PARK 21ST FILING" DO HEREBY DECLARE THAT THE SUBDIVISION OF SAID LAND IS WITH THEIR FREE ACT AND DEED AND IN ACCORDANCE WITH THEIR DESIRES AND DO HEREBY DEDICATE THE RIGHT OF WAYS SHOWN HEREON TO THE PUBLIC.

RON McMURRAY, MANAGING MEMBER
LARAMIE LAND HOLDINGS, LLC
RON McMURRAY, MANAGER
2R INVESTMENTS, LLC

ACKNOWLEDGEMENTS

STATE OF WYOMING)
)SS
COUNTY OF LARAMIE)


THE FOREGOING DEDICATION WAS EXECUTED BEFORE ME ON THIS ____ DAY OF _____, 2026, BY RON McMURRAY, MANAGING MEMBER OF LARAMIE LAND HOLDINGS, LLC, AND MANAGER OF 2R INVESTMENTS, LLC, OWNERS IN FEE SIMPLE OF THE LAND EMBRACED IN THIS PLAT, AND THAT THE EXECUTION OF SAID INSTRUMENT WAS THEIR OWN FREE ACT AND DEED.

NOTARY PUBLIC, STATE OF WYOMING

MY COMMISSION EXPIRES : _____

CERTIFICATE OF SURVEYOR

I, ADAM E. DESCHLER, A PROFESSIONAL LAND SURVEYOR LICENSED IN THE STATE OF WYOMING DO HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM THE RECORDS AND FIELD NOTES OF A SURVEY CONDUCTED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT ALL DIMENSIONS AND OTHER DETAILS ARE CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

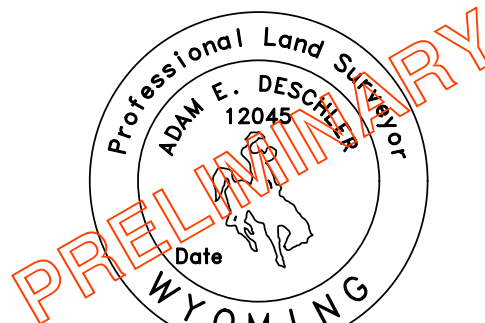

FINAL PLAT
FOR
SWAN RANCH RAIL PARK 21ST FILING
A REPLAT OF TRACT A SWAN RANCH RAIL PARK 18TH FILING,
TRACT 1 OF SWAN RANCH RAIL PARK 20TH FILING AND A PORTION
OF CLEAR CREEK PARKWAY SITUATED IN A PORTION OF
SECTIONS 14, 15 AND 23, TOWNSHIP 13 NORTH,
RANGE 67 WEST, OF THE 6TH P.M.,
CITY OF CHEYENNE, STATE OF WYOMING
PREPARED APRIL 2026

DATE					
REVISION					
NO.					
PREPARED FOR: 2R INVESTMENTS LLC					
PROJECT: SWAN RANCH RAIL PARK 21ST FILING					
DRAWING TITLE: FINAL PLAT					
307.637.6017 1103 OLD TOWN LANE, SUITE 101 CHEYENNE, WY 82009 AVI@AVIPC.COM					
DATE:	Apr 08, 2026				
DRAWN BY:					
DESIGNED BY:	CRJ				
CHECKED BY:	AED				
JOB NO.:	5122				
DRAWING NO.	1	OF 1			